



200E | Hydrasander

Bucket Mesh Aperture:	10 x 5 mm
Power Requirements:	7.5kW
Water Requirements:	2270 - 4540 litres/min 500 - 1000 UK gpm 600 - 1200 US gpm



Specifications

Bucket Wheels

Bucket Wheel Diameter: 4572mm - 15'0"
 Number of Buckets: 54
 Bucket Width: 635mm - 2'1"
 Operating Bucket speed: 0.25 - 1.0rpm

Spiral

Spiral Diameter: 2054mm - 6'9"
 Spiral Length: 4332mm - 14'3"
 Operating Spiral Speed: 0.5 - 3.5rpm

Capacities

Holding Capacity: 20,430 litres
 4,500 UK gallons
 5,400 US gallons
 Output Capacity: 100 - 200 TPH depending on application

Hydraulics

Max. Hydraulic Pressure:
 Bucket - 155 Bar
 - 2250 PSI

Spiral - 124 Bar
 - 1800 PSI

Max. Hydraulic Oil Flow:
 Bucket 23 litres/min
 5 UK gal/min
 6 US gal/min

Spiral 23 litres/min
 5 UK gal/min
 6 US gal/min

Hydraulic Oil Capacity: 180 litres
 40 UK Gallons
 48 US gallons

Powerunit

7.5kW Electric Hydraulic Unit
 Pump: Tandem 1PL052 / 1PL052 CTD

Hydrasander 200E




Standard

- Electric hydraulic drive 7.5kW
- 4.57m (15') diameter bucket wheel (tandem buckets)
- 2.05m (6'9") diameter fines recovery spiral 4.3m (14'3") long
- Independent variable speed control on both bucket wheel and spiral
- 54 nr 635mm (25") wide corrosion resistant bucket meshes (10 x 5mm slotted)
- Drainage butterfly valve
- Discharge chute
- Guards to M & Q specification
- Emergency stops (4 nr)
- Tank capacity 20,430 litres (4,500 UK gallons)
- 11.0 tonnes unladen weight

Options

- Hydraulic drive from rinser
- 6m standard open sand water troughing 362mm x 191mm
- 6m of 6mm rubber lined standard open sand water troughing 362mm x 191mm
- Steel lined discharge chute
- 6mm thick rubber lined discharge chute
- 300mm high support legs
- Special paint colour (if different from Finlay Orange RAL 2002). RAL must be specified on order
- 1.5m main body and spiral extension

Transport Position

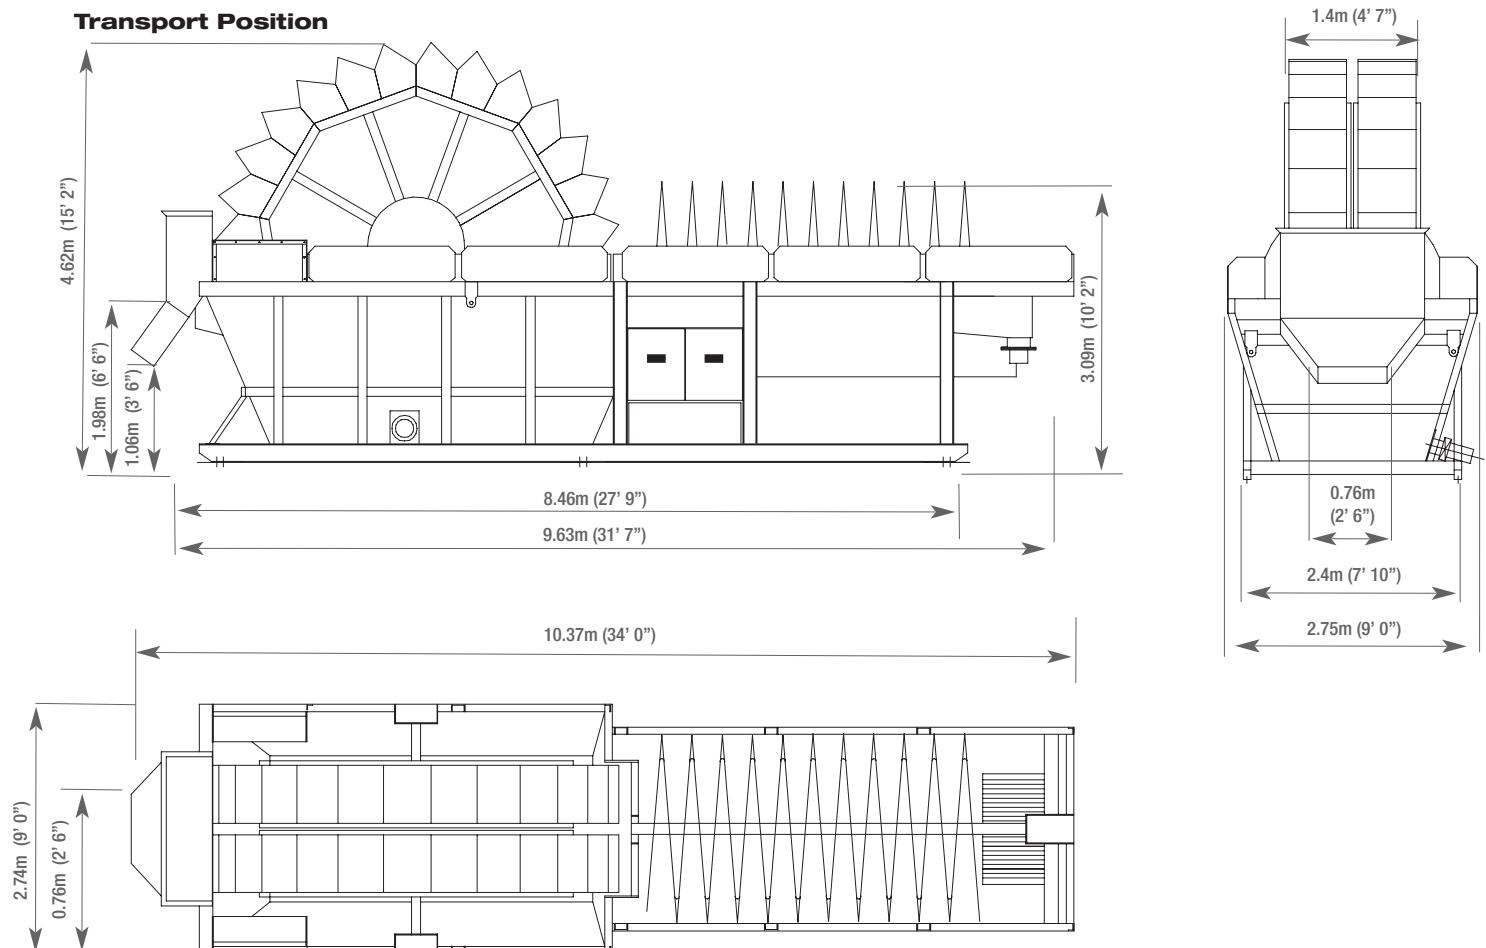

Effective 01: 01, 2008. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries.
Copyright 2008 Terex Corporation.